

## Specification Sheet

### H25-SE-R1N, H25-SE-R2N, & H25-SE-R3N

SHEET # 940-2T545

#### DESCRIPTION

The H25-SE-R1N, H25-SE-R2N, and H25-SE-R3N are AMCI size 25, servo mount, single turn transducers with end connectors that are mechanical and electrical replacements for Allen-Bradley's 846-SJHN1CG-R1, 846-SJHN1CG-R2, and 846-SJHN1CG-R3 Industrial Resolvers. Physically identical, the only difference is the resolver embedded in the transducer. Their IP64 rating means they will survive most industrial applications including washdowns.

Several variations of this package, that do not have Allen-Bradley equivalents, are available as special orders. The first option is a shaft seal that raises the environmental rating from IP64 to IP67. The other options are three different shaft sizes, including 1/4 inch, 10 mm, and 3/8 inch with a 3mm keyway. For additional information on these options, contact the factory through our general sales e-mail account; [sales@amci.com](mailto:sales@amci.com), or directly at (860) 585-1254 from 8AM to 5PM EST, Monday through Friday.


For additional information on all products available from AMCI, visit our website, [www.amci.com](http://www.amci.com).

#### PRODUCT COMPATIBILITY

AMCI Part Number	Harowe Equ.	Commonly Used With
H25-SE-R1N	11BRW-300-F	IMC-120™, IMC-123™ & 8200 CNC
H25-SE-R2N	11BRCX-300-C	8600 CNC, Creonics Resolver Modules
H25-SE-R3N	11BRCX-300-J1	All AMCI Resolver Products

#### DIMENSIONAL DRAWING

( ) = Dimensions in millimeters

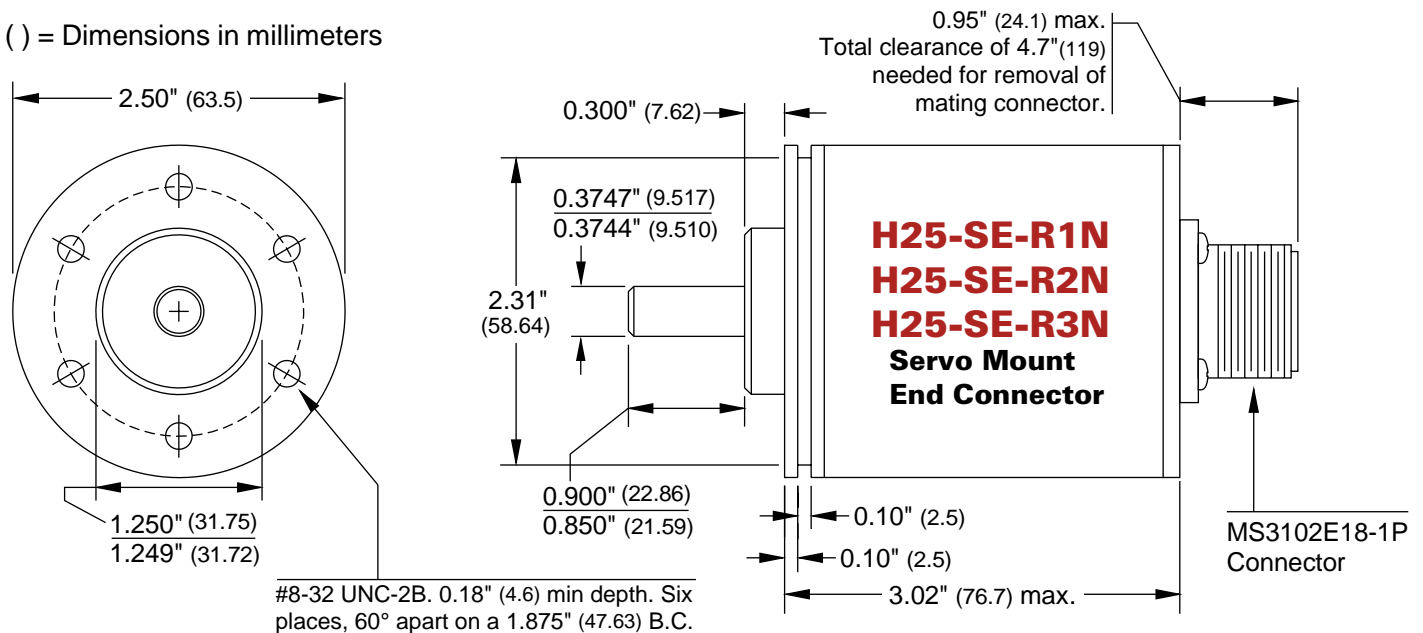

# H25-SE-R1N, -R2N, & -R3N Specification Sheet

## SPECIFICATIONS

### "R1N" ELECTRICAL

Resolver Type: Control Transformer  
Primary: Stator  
Input Voltage: 12.0 V  
Input Freq: 2500 Hz  
Input Current: 20.0 mA Max.  
Output Voltage: 6.00 V Nom.  
Trans. Ratio (TR): 0.50 ± 5%  
Accuracy: ± 12 min. (max error)

### "R2N" ELECTRICAL

Resolver Type: Transmitter  
Primary: Rotor  
Input Voltage: 6.0 V  
Input Freq: 1000 Hz  
Input Current: 20.0 mA Max.  
Output Voltage: 2.7 V Nom.  
Trans. Ratio (TR): 0.45 ± 5%  
Accuracy: ± 12 min. (max error)

### "R3N" ELECTRICAL

Resolver Type: Transmitter  
Primary: Rotor  
Input Voltage: 7.0 V  
Input Freq: 5000 Hz  
Input Current: 20.0 mA Max.  
Output Voltage: 6.65 V Nom.  
Trans. Ratio (TR): 0.95 ± 5%  
Accuracy: ± 12 min. (max error)

### MECHANICAL

Shaft Loading: Radial: 40 lbs. max.  
Axial: 20 lbs. max.  
Starting Torque: 1.5 oz.in. @ 25°C  
Moment of Inertia: 6.00X10<sup>-4</sup> oz-in-sec<sup>2</sup> max.  
Weight: 1 lb.

### ENVIRONMENTAL

Shock: 50 g's for 11 mSec  
Vibration: 15 g's to 2000 Hz  
Operating Temp: -20 to 125°C  
Enclosure: IP64  
Powder Coat  
Aluminum Body  
303 Stainless Steel Shaft  
  
IP67 available as option-  
Consult factory.

IP Ratings: 6 = Totally protected  
against dust.

AND: 4 = Protected against  
sprays from all  
directions.


OR: 7 = Protected against the  
effects of temporary  
immersion between  
15cm and 1m.

## CONNECTOR PINOUT

The figure below shows the connector pinout to industry standard designations and wire colors. Mating connectors available from AMCI are also given.

Female Mating Connector .....	AMCI Part #
MS3106A18-1S STRAIGHT .....	MSD-10

BENDIX CONNECTOR: MS3102E18-1P

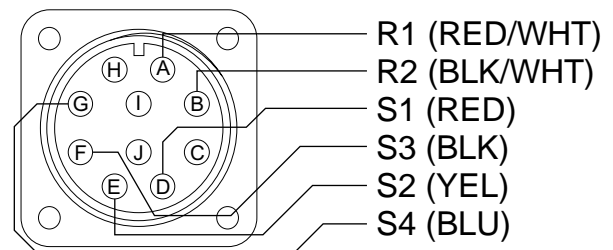

## FOR MORE INFORMATION

If you need more information on the H25-SE-R1N, -R2N, or -R3N, use these three resources:

- \* If you have internet access, check our website at <http://www.amci.com>. We've worked hard to make our site the repository of information you need to specify and use AMCI products. New product news, product specifications, compatibility tables, application notes, and PDF manuals are all available 24 hours a day.
- \* You can also call AMCI for sales or technical support at (860) 585-1254 from 8AM to 5PM EST, Monday through Friday. An applications engineer will be available to assist you.
- \* Finally, you can e-mail us at [sales@amci.com](mailto:sales@amci.com) or [techsupport@amci.com](mailto:techsupport@amci.com).